

DUSK TO DAWN LED BULB

Features:

- The bulb turns on automatically in dark area or in dusk (≤ 30 lux)
- The bulb turns off automatically since dawn (≥ 70 lux) or environment lux increase around 70 lux more
- Plastic coated aluminium lamp body, electrical isolated and perfect heat dissipating, long life time
- Set 6-second induction detection delay to filter environmental interference
- The lights don't flash from day to night at critical points

Certification: UL, FCC

Application: Droplight and streetlight, balconies and courtyard, parks, and parking lots


Specification:

Part number	Base	Power	Lumen ($\pm 10\%$)	Turns On Lux
LITA19-8-30KDD	E26	8W	800lm	appr. 30 lux



Turns Off Lux	Input Voltage	CRI	Beam Angle	Color temperature
appr. 70 lux plus	AC100-240V 50/60HZ	80	270°	3000K



VISUAL DEMO

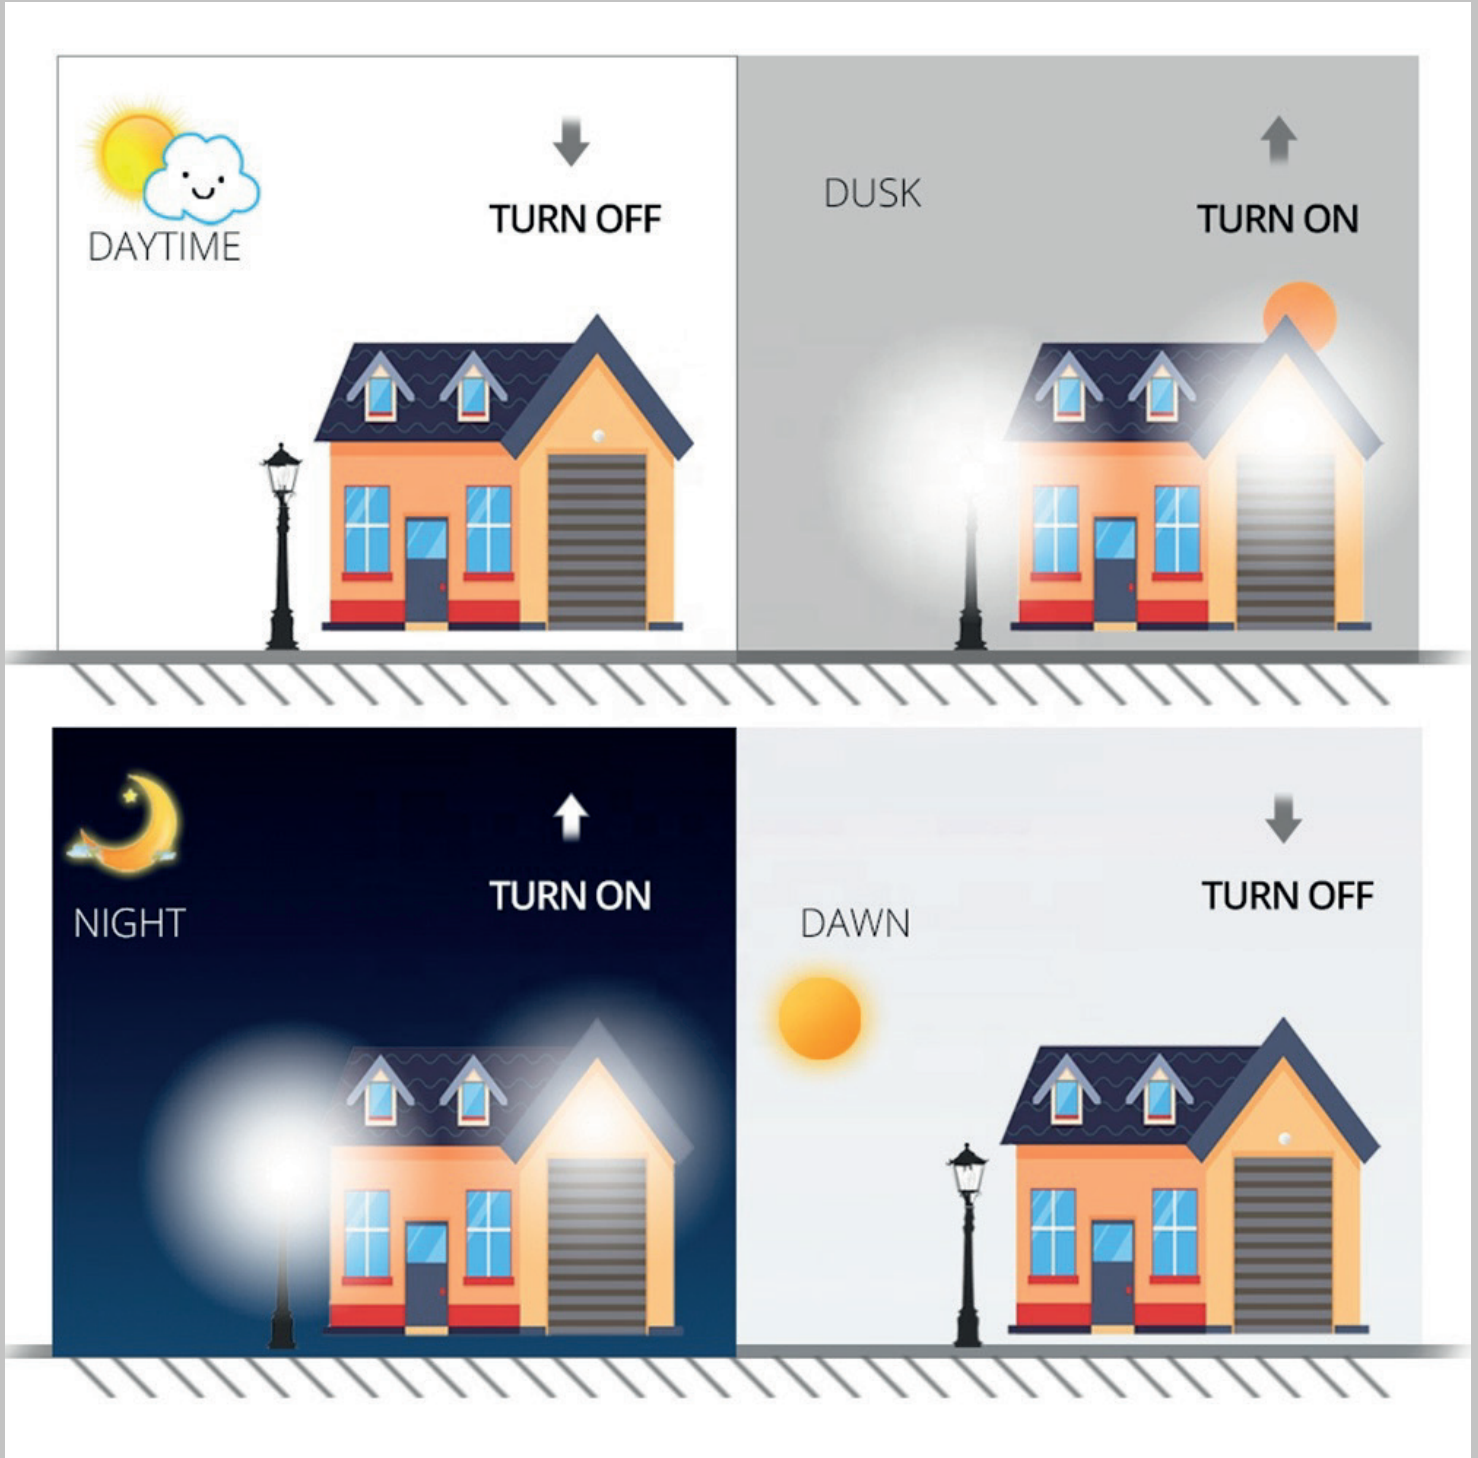

APPLICATIONS

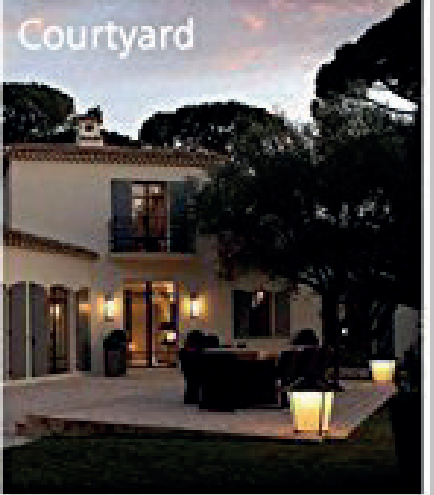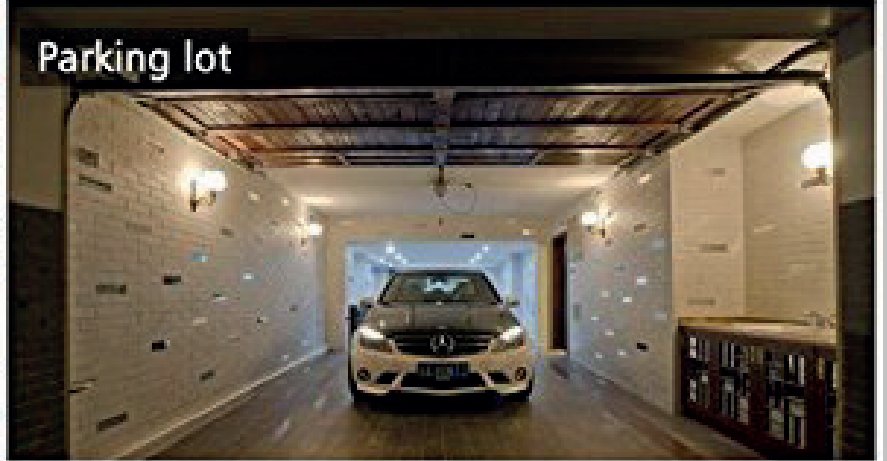

USER MANUAL

Dusk To Down LED Bulb Light is widely used at garage, hallway, porch, patio, garden, basement, deck, warehouse, stairway, etc. It automatically switches ON at dusk and OFF at dawn.

Installation


Simply fit the bulb into any standard E26 / E27 socket or fixture, no wires or additional motion detection fixture required.

How It Works

Build-in dusk to dawn sensor makes the bulb switch on at dusk and off at dawn automatically.

If a switch is installed for the bulb, we can turn the bulb off / on by the switch when the bulb is light on at dusk.

While, we can not turn on the bulb when the bulb is light off at dawn.

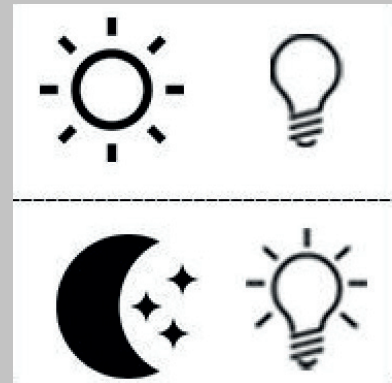

WARNING

- * Double insulation.
- * Suitable for use in damp location.
- * Do not use the bulb with dimmers.
- * Not for use in totally enclosed luminaires.
- * Discontinue use if damaged.
- * Please do not disjoint or modify the bulb for any purpose.
- * Turn power off before installation or removal the led bulb.
- * Please check the voltage before install the bulb, make sure voltage is match with lamp bulb input voltage.