
Item No.: LIT7432GD-CRY

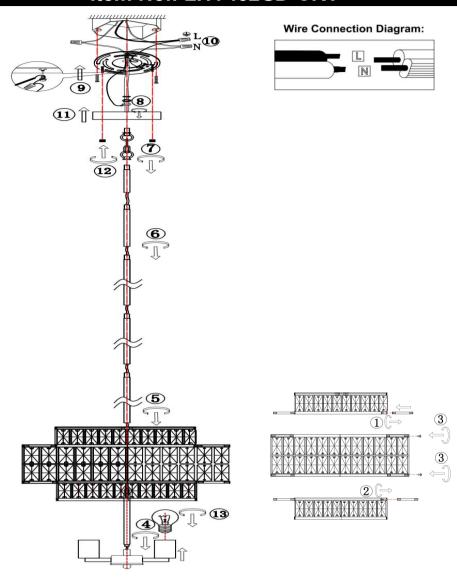

- 1. At top and bottom layer crystal frame, fixed the metal tubes by screws from inside (1-2).
- 2. After steps (1-2), connect the middle layer with top & bottom layer by aligned the hole then fix the metal tubes by screws from outside.(3)
- 3. Tighten the tube and fix the lamp socket part then through the crystal frame(5), tighten all pipes(6) and chain loops(7).
- 4. Through the wires into the canopy and fixed by nuts(8).
- 5. Attach mounting plate to the junction box in the ceiling with outlet box screws (9).
- 6. Connect the wires in the outlet box to the light fixture wires using the wire connectors (10).
- 7. Fix the canopy (11) to the ceiling plate by nuts (12).
- 8. Insert bulbs (13).
- 9. Turn on the lighting fixture.

ATTENTION:

FIXTURE INSTALLATION MUST BE DONE BY LICENSED ELECTRICIAN.
SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER.

USE ONLY THE SPECIFIED BULBS AND DO NOT EXCEED THE MAXIMUM WATTAGE.

BEFORE YOU INSTALL:

- 1. Check the fixture frame for any physical damage.
- 2. Check all parts to ensure they are not damaged or missing.
- 3. Test all sockets with a bulb for conductivity before "dressing" the fixture.
- 4. If there is any problem, please do not install the fixture, please contact the vendor and solve the problem first.